


	Part	Part. no.
1	Fixing profile	IP5000
2	Staps	SS5221
3	Staps, self-tapping	SS6191

NOTE! On double plate, the brackets are always mounted across joint. Distance between brackets c/c 900 - 1100 mm (the plate determines). If the outermost bracket is to be installed on single plate, the max. separation = half the c/c measurement.


Approved for use with minimum 0.4 mm steel plate or, alternatively, 0.5 mm aluminium plate.

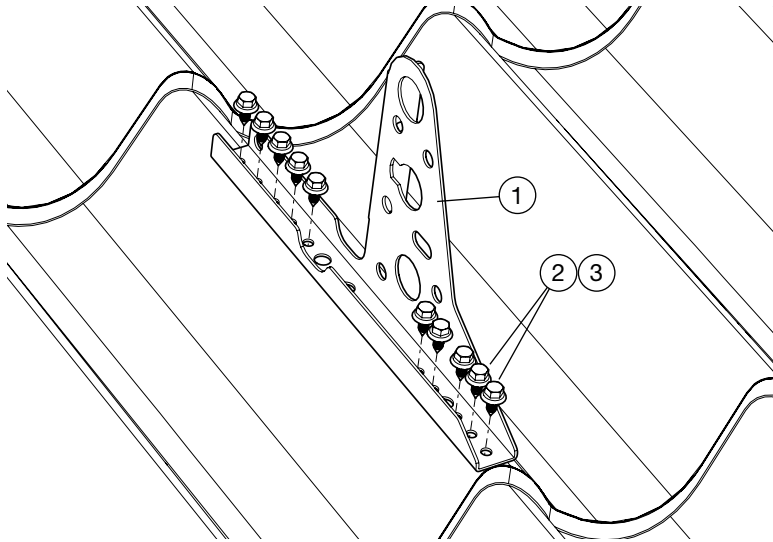

Profiled Plate

Place the fixing profile (1) against the top of the plate's profile and precisely on the profile's lower edge. Screw firmly in place with 10 self-tapping plate screws 6.3x19 mm (2). If the plate thickness exceeds 0.7 mm, screws with drill tip may be used (3).

NOTE! Use torque adjustment on the screwdriver, so the screw does not lose its grip in the plate.

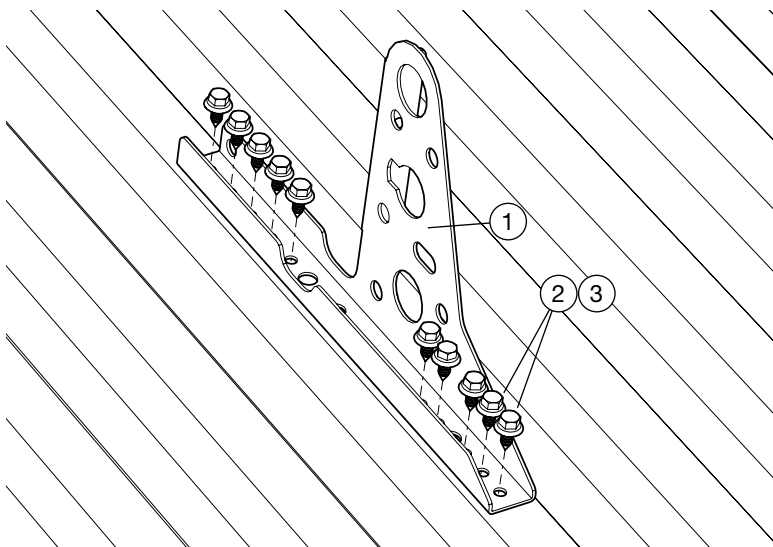

Corrugated plate (TRP)

Place the fixing profile (1) against the top of the plate's profile. Screw firmly in place with 10 self-tapping plate screws 6.3x19 mm (2). If the plate thickness exceeds 0.7 mm, screws with drill tip may be used (3).

NOTE! Use torque adjustment on the screwdriver, so the screw does not lose its grip in the plate.