


Mount the brackets on the wall using through bolts or M12 expander. The platform is assembled using 4 M10x20 + nuts. Each grating is screwed to the platform using 4 M8 J-hooks + nuts.


The platform can also be installed using suspension bars or combination suspension bar/bracket.

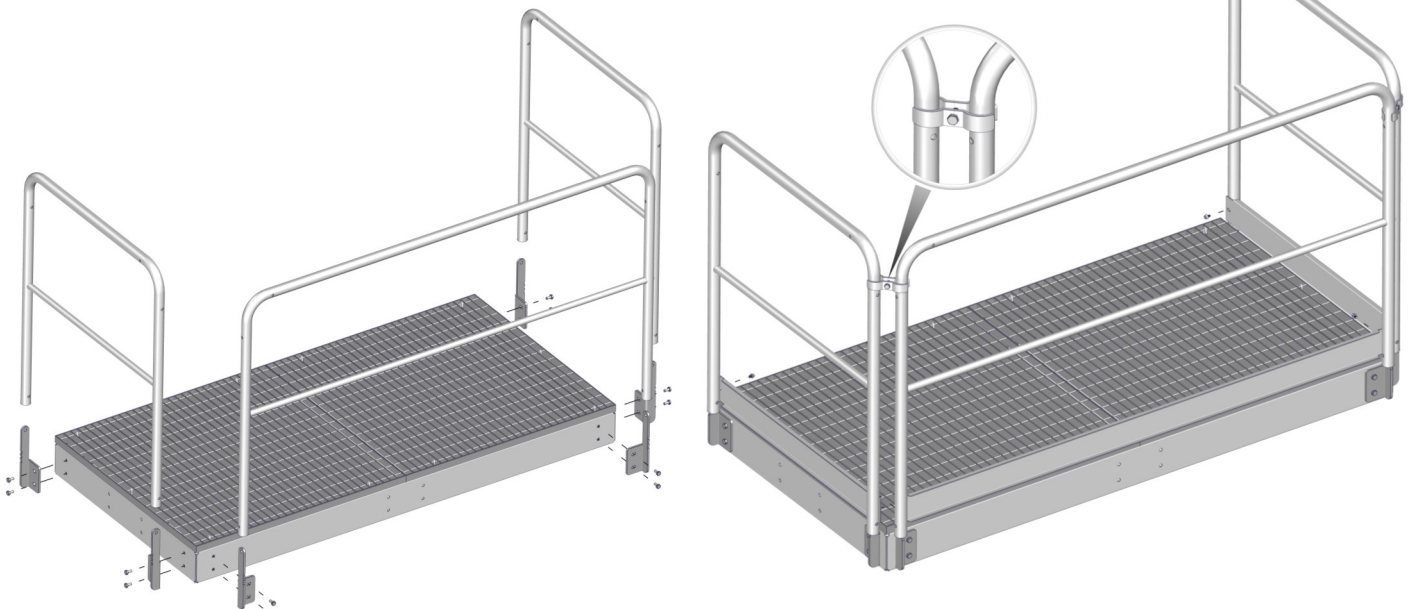

Screw the railing brackets to the platform using 2 M10x20 + nuts, then insert the railings into the fasteners and tighten the lock.

**NOTE! Don't forget to place the lock in the trailing tube in advance!**

Finally, assemble the corner couplings. Any kick strip is assembled using self-drilling screws.

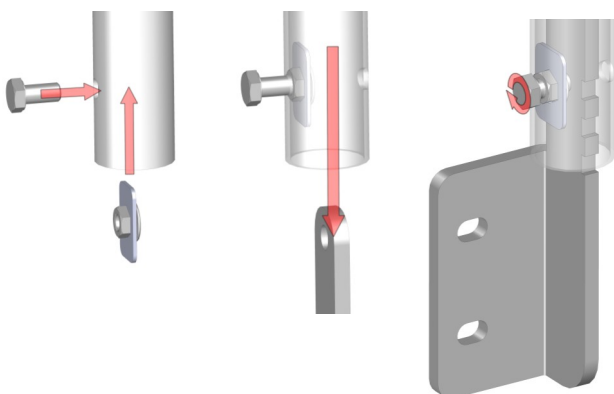

For connecting ladders, the safety cage is adjusted so the back hoop connects to the rail-